

Name | Select CASAMBI Ref PRODUCT MODULE (MAX 4 MODULES) COLOR EXAMPLE CODE NIT101: Select 1T Casambi Stainless Steel Code **Product** Select Ni Sq Square Circum Select** CN

	Casambi 3T	Т3
	Casambi 4T	T4
min40	Color	Code
	Stainless Steel	01
*2mm for Select, 0mm for Squares	Matt White RAL9010	02
#*Dimensions voor Lithoss Circum	Gunpowder Black	03
	Brushed Brass	06
	Chrome	08
	Nickel	09
	Textured White RAL9010	13
	Textured Black	14
	Bronze Antique	17
	Matt Black	18
	Tin Antique	19
	Brass Antique	20
	Copper	29

Circum Square*

Module

Casambi 1T

Casambi 2T

nstallatie- en onderhoudsrichtlijnen met betrekking tot de fabrieksgarantie

Battery specifications

- . De plaatsing, de aansluiting en het uittesten van dit toestel dient steeds te gebeuren door een erkend elektro-installateur
- 2. Dit toestel moet geïnstalleerd, verbonden en getest worden volgens de nationaal geldende reglementen op de elektrische

Туре

- I 3. Deze technische bijsluiter dient te worden beschouwd als een onderdeel van de algemene verkoopsvoorwaarden van Lithoss nv/sa.
- 4. De elektro-installateur is verantwoordelijk voor het gebruik van compatibele apparaten die voldoen aan de geldende CE en IEC normen.
- 5. Gebruik steeds de 'tool' voor het verwijderen van de 'Cover Plate' (afdekplaat).
- 6. Reinig het toestel enkel met een zachte en licht vochtige doek zonder reinigingsmiddel.
- 7. Leg altijd eerst de electriciteit af alvorens te plaatsen en installeren!

FR Instructions d'installations et d'entretien à respecter vis-à-vis de la garantie d'usine.

- 1. Le placement, le raccordement et l'essai de cet appareil doivent toujours être effectués par un électricien / installateur
- Cet appareil doit être installé, branché et testé suivant le règlement national sur les installations électriques en vigueur.
- Ce manuel d'installation technique représente une partie des conditons générales de vente de Lithoss nv/sa.
 L'installateur est responsable pour l'usage des produits compatible, qui sont conformes aux normes CE et IEC en vigueur.
- . Utilisez toujours le 'tool' pour l'écartement du 'Cover Plate' (plaque de couvercle). . Nettoyez l'appareil uniquement avec un chiffon doux et légèrement humide sans déterger
- Toujours débrancher l'électricité AVANT d'installer!

Installation and maintenance instructions associated to the manufacturer's warranty.

- The installation, connection and testing of this device should always be performed by a recognized electrician / installer.
 This device needs to be installed, connected and tested according to the official national instruction guide for electrical
- 3. This technical manual is to be considered as an additional term to the general sales conditions of Lithoss nv/sa.
- The installer is responsible for the use of compatible products which meet the CE and IEC rules.
 Always use the 'tool' for the removal of the 'Cover plate'.
- Clean the device only with a soft and slightly wet piece of cloth without any detergent.
 Always switch off the electricity BEFORE installation!

DE Montage und Unterhal Instruktionen zu beachten mit Bezug auf der Fabrikgarantie.

- 1. Die Montage, der Anschluß und das Austesten des Gerätes soll immer von einem zertifizierten electro-Installateur ausgeführt werden.
- 2. Das Gerät muß installiert, angeschlossen und getestet werden nach der allgemeinen nazionalen Richtlinien über die elektrische Installationen
- 3. Diese technische Gebrauchsanweising gehört zu den allgemeinen Verkaufsbedingungen von Lithoss nv/sa.
- Der electro-Installateur is verantwortlich für das Verwenden von CE und IEC kompatibele Produkte.
 Benutzen Sie immer das 'tool' für den Abbau der 'Cover Plate' (Deckplatte).
- Das Gerät nur reinigen mit einem zarten und leicht feuchten Lappen ohne Reinigungsmittel.
 Immer die Elektrizität ausschalten bevor Installation!

Installation



CS

T1


T2

Code


2025 CR 2025 Lithium 3V 20mm 2032 CR 2032 Lithium 3V 20mm

RECESSED WALL BOX INSTALLATION


CAS MBI



FIX FRAME TO WALL OR JUNCTION BOX WITH 2 SCREWS (USE HOLES ON VERTICAL AXIS)



PLACE COVERPLATE INTO FRAME




Gebruik steeds de Lithoss tool of paperclip voor het verwijderen van de afdekplaat. Always use the Lithoss push pin or paper clip for the removal of the cover plate. Verwenden Sie immer den Lithoss Push-Pin oder Büroklammer für das Entfernen der Deckplatte Utilisez toujours le Lithoss 'push pin' ou trombone pour l'écartement de la plaque de finition.

CASAMB

Button definition

Circum

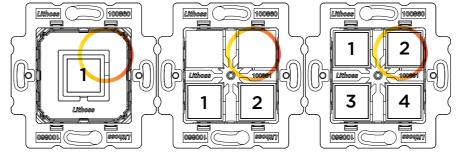

Battery position

For Lithoss 2T: 1: Left 2: Right

1: Upper Left

For Lithoss 3T variant, there is no '2: Upper Right'

Battery properties

The Lithoss Casambi switch is only compatible with batteries type 2025 & 2032 (not included).

Battery life

Once inserted, the device can go through more than 6000 (2025) to 8000 (2032) cycles before draining the battery.

The expected battery life is up to more than 5 years with a 2025 and up to 7 years with a 2032.

We recommend using batteries without child secure foils or coatings as these might cause problems with the contacts of the battery.

CUSTOMER SERVICE

info@lithoss.com www.lithoss.com ++32(0)56481598



For Lithoss 4T:

- 2: Upper Right 3: Lower Left
- 4: Lower Right
- 4. Add your switch to the desired network

Connecting your device to the Casambi app

To make your device visible in the app:

Setting up your device

5. Link your switch button(s) with its desired function(s)





For 1T: Hold down the button for at least 12-15 seconds

For 2-3-4T: Hold down two buttons for a few seconds.

Make sure the switch is powered by inserting a battery as described in this manual





Download the Casambi app:

Play store









To maximize the range of your switches, choose the 'Balanced mode' while creating your network. This can only be changed when creating a new network.



For more information about the Casambi app, consult the Casambi manual or website.

https://itunes.apple.com/app/casambi/id731859317 https://play.google.com/store/apps/details?id=casambi.ambi https://casambi.com/tutorial-videos/