

Product Bulletins

Switches


KNX/EIB version

GENERAL DESCRIPTION

The Lithoss Piano pushbuttons are also available in a KNX/EIB version. The pushbutton frames are delivered with a plug & play wired KNX/EIB pushbutton interface reducing the installation time to an absolute minimum. All buttons can be separately programmed to their own specific function using the ETS software.

The mounting frame can be turned 90°.

Not suitable for wall boxes without screws.

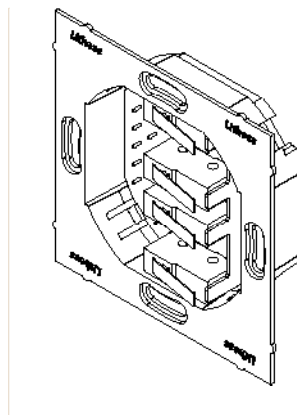

TECHNICAL SPECIFICATIONS



Switching functions	Multiple functions including : On/Off, Dimming, Up/Down, Scene's, ... <i>More info can be found in the application software guide.</i>
LED functions	Status indication, or independant output
BUS connection	Twisted Pair - 30 VDC
BUS consumption	max. 15mA
Lifecycle	10.000.000 mechanically / 50.000 at full load
Protection value	IP30
Connection method	Red / Black KNX connector
Advised wallbox type	Depth 45mm or deeper, with screws Size internal Ø60mm or 50x50mm

APPROVAL

CE	Conform
RoHS	RoHS compatible


INCLUDED PARTS

Piano cover	Mounting frame with double removable connectors Plug & Play interface
-------------	--

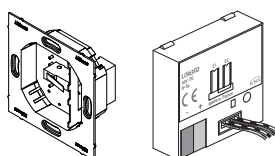

Li56302 : KNX Interface (2 buttons)
Li56304 : KNX Interface (4 buttons)

Piano backcover



Piano hook (removal tool), Installation manual

